

**canfield connector**  
 8510 Foxwood Court  
 Youngstown, Ohio 44514  
 (330) 758-8299 Fax: (330) 758-8912  
 www.canfieldconnector.com


**B-TYPE / SENSOR CONNECTORS**

FOR USE WITH CANFIELD  
 PROXIMITY DEVICES

**Dimensional Data**

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE NOTED


**12mm Female Molded Locking Connector**  
 250V AC/DC 4 Amps max.

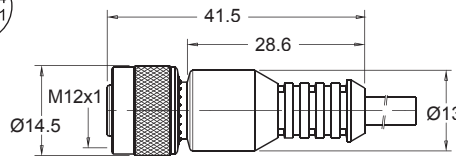

Order part number

- RC12S-F0M030120 (3 pin / 2m)
- RC12S-F0M030150 (3 pin / 5m)


**12mm Male x 12mm Female Molded Locking Cable**  
 250V AC/DC 4 Amps max.

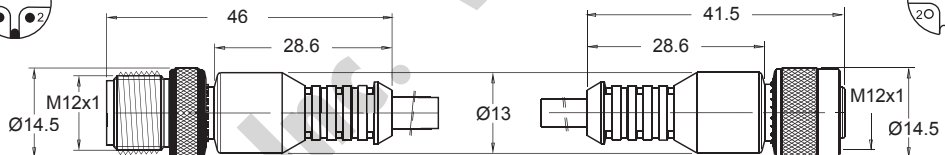

Order part number

- RCA-12SM00-12SF0041 (4 pin / 1m)
- RCA-12SM00-12SF0042 (4 pin / 2m)


**12mm Female Field Wireable Connector**  
 250V AC/DC 3 Amps max.

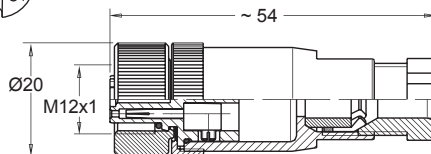

Order part number

- RC12B-F0F0400 (4 pin / 4-6mm cable dia.)
- RC12B-F0F0401 (4 pin / 6-8mm cable dia.)

**12mm Male Field Wireable Connector**  
 250V AC/DC 3 Amps max.

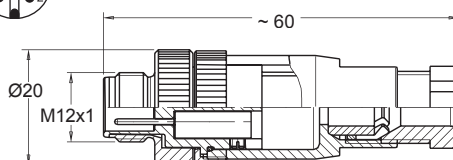

Order part number

- RC12B-M0F0400 (4 pin / 4-6mm cable dia.)
- RC12B-M0F0401 (4 pin / 6-8mm cable dia.)

B  
T  
Y  
P  
E

