



Filter – Miniature

SF1

= "Most Popular"



Manual Drain



Auto Drain



SF1-02-SYV0

Features

- Stainless Steel Construction Handles Most Corrosive Environments
- Fluorocarbon Seals Standard
- Meets NACE Specifications
- High Flow: 1/4" – 23 SCFM

Specifications


Flow Capacity*	Port Size	5 Micron 23 SCFM
Bowl Capacity		1.0 Ounces
Filter Rating		5 Micron
Port Threads		1/4 Inch
Pressure & Temperature Ratings		0 to 300 PSIG (0 to 20.7 bar) 40°F to 180°F (4°C to 82°C)
Useful Retention**		0.4 Ounce
Weight		0.6 lb. (0.27 kg)

* Inlet pressure 90 PSIG (6.2 bar) and 5 PSID (0.3 bar) pressure drop.

**Useful Retention refers to volume below the quiet zone baffle.

Materials of Construction

Body	316 Stainless Steel
Bowl	316 Stainless Steel
Deflector	Acetal
Drain	316 Stainless Steel
Element Holder	Acetal
Filter Element	Polyethylene
Seals	Fluorocarbon

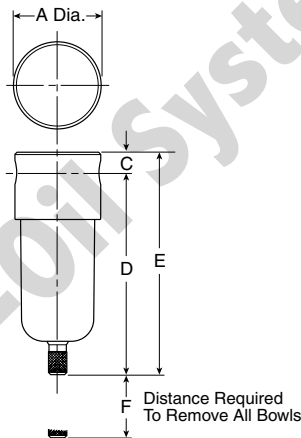

Dimensions


Models	Inches (mm)	A	C	D	E	F
Miniature Unit SF1-02-XXXX		1.57 (40)	0.31 (8)	3.69 (94)	4.00 (102)	1.58 (40)

 = "Most Popular"

SF1 Filter Kits & Accessories

Filter Element Kits –

- Particulate (5 Micron) SRP-96-001
- Particulate (20 Micron) SRP-96-002
- Manual Drain SRP-96-008
- Pipe Nipple – 1/4" 316 Stainless Steel SRP-96-009

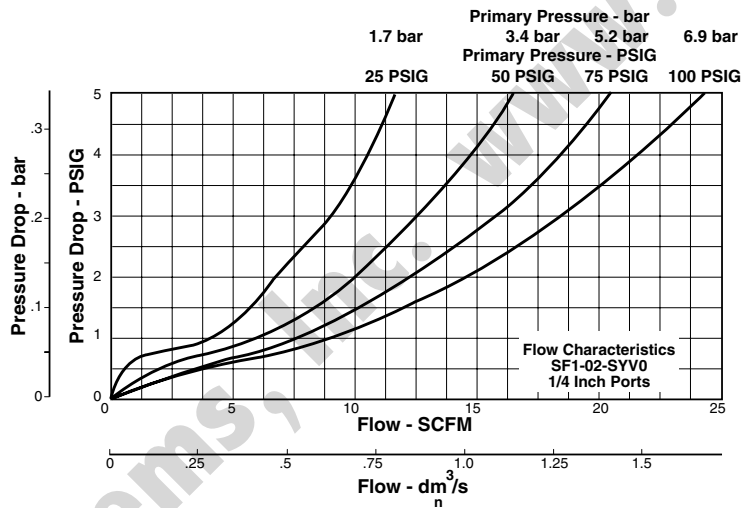

Ordering Information

Model Type	Port Size	Model
Manual Drain	1/4	SF1-02-SYV0

Options - To order an option supplied with the unit model, add the appropriate coded suffix letter in the designated position of the model number.



Air-Oil Systems, Inc. www.airoil.com

a scratch of pen