



LoPro[®] RTU

***LIGHT & MEDIUM CAPACITY
ROBOT TRANSFER UNITS***



EXPERTLY DESIGNED, DELIVERED TO PERFORM

Powered by over 70 years of relentless problem-solving and steadfast reliability, Bishop-Wisecarver delivers innovative motion solutions around the world that thrive in harsh and extreme conditions. Our linear and rotary motion solutions, custom complex assemblies, and embedded intelligence systems lead the manufacturing industry, and they are backed by The ***Signature Experience*** promise of expert guidance, confidence and customer satisfaction.

EXTENDING ROBOTICS IN CRITICAL APPLICATIONS

Our solutions use the self-cleaning action of DualVee Motion Technology® for maximum environmental and debris resistance. This ability to excel in harsh and extreme conditions is especially crucial for drilling, welding, painting, and more. Many solutions that run on DualVee guide wheels require no maintenance over the planned life of the machine.

DualVee Guide Wheel Based RTUs Are Ideal For:



LONG
LENGTH



HARSH DEBRIS
ENVIRONMENTS



LOW TOTAL COST
OF OWNERSHIP



LOW NOISE




SMOOTH, LOW
FRICTION MOTION



HIGH/LOW
TEMPERATURE

INTRODUCTION

Both traditional and collaborative robots can benefit from Bishop-Wisecarver 7th Axis Robot Transfer Unit solutions- available in light, medium and heavy capacity. Each system is designed for **durability, ease of installation, and low total cost of ownership**. Our expert application engineers can help you select the complete 7th axis system solution that is right for you, or customize a solution to meet your exact requirements.

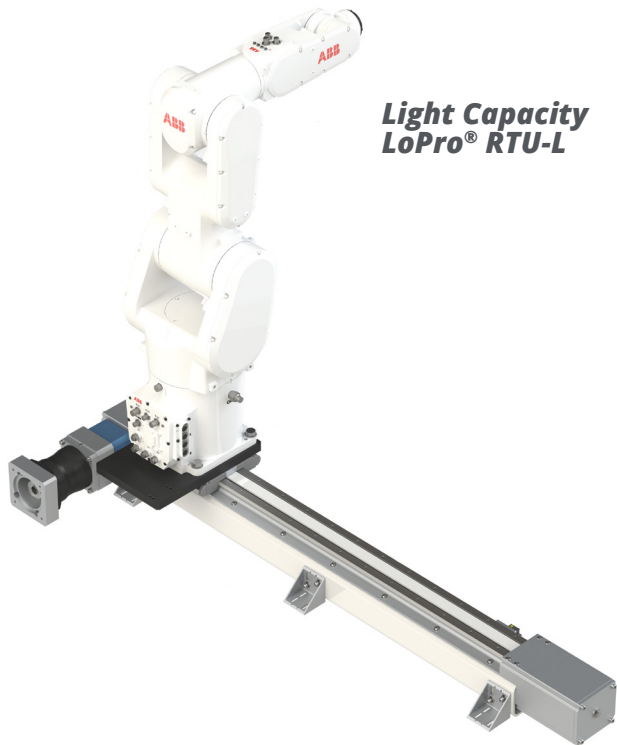

**Light Capacity
LoPro® RTU-L**




**Medium Capacity
LoPro® RTU-M**

TABLE OF CONTENTS

Introduction	3 - 5
LoPro® RTU-L Light Capacity	6 - 7
LoPro® RTU-L Inverted Light Capacity	8 - 9
LoPro® RTU-M Medium Capacity	10 - 11
LoPro® RTU Accessories	12
Example Robots	13
Load Calculations	13 - 14
Stock Codes, Setup & Maintenance	15

LOPRO® RTU OVERVIEW

Light Capacity

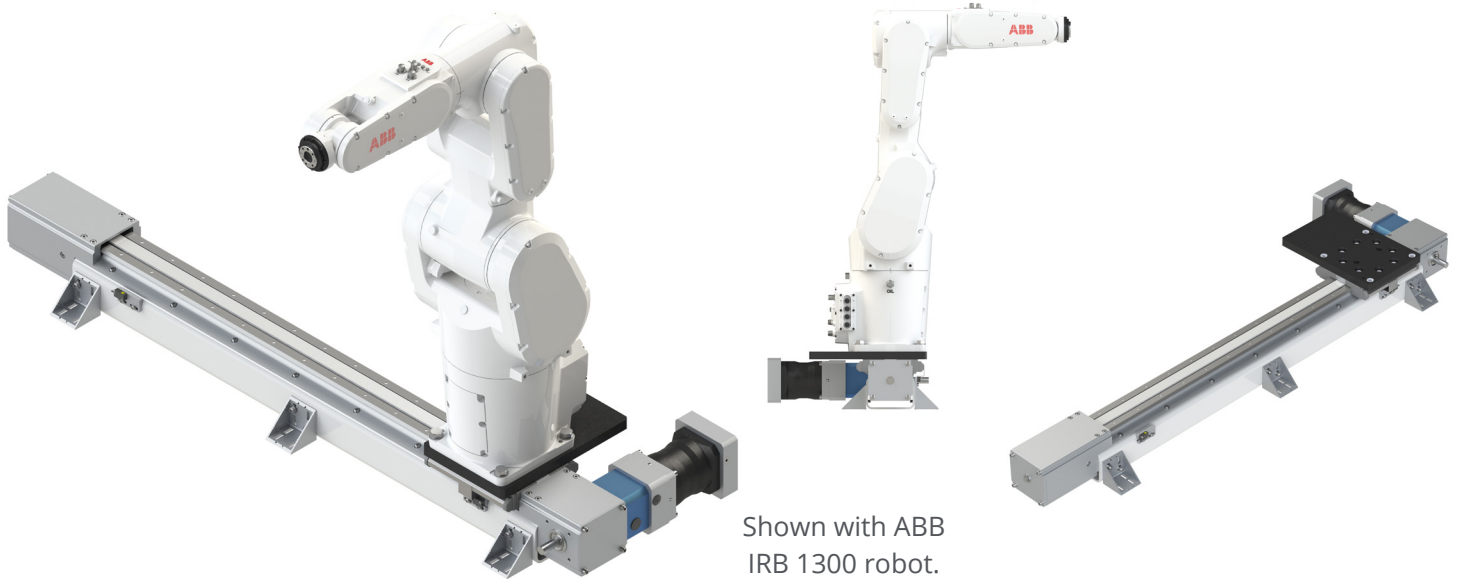


Light Capacity Inverted




Shown with Fanuc CRX-10iA
Cobot & cable carrier.

LOPRO® RTU OVERVIEW

Medium Capacity

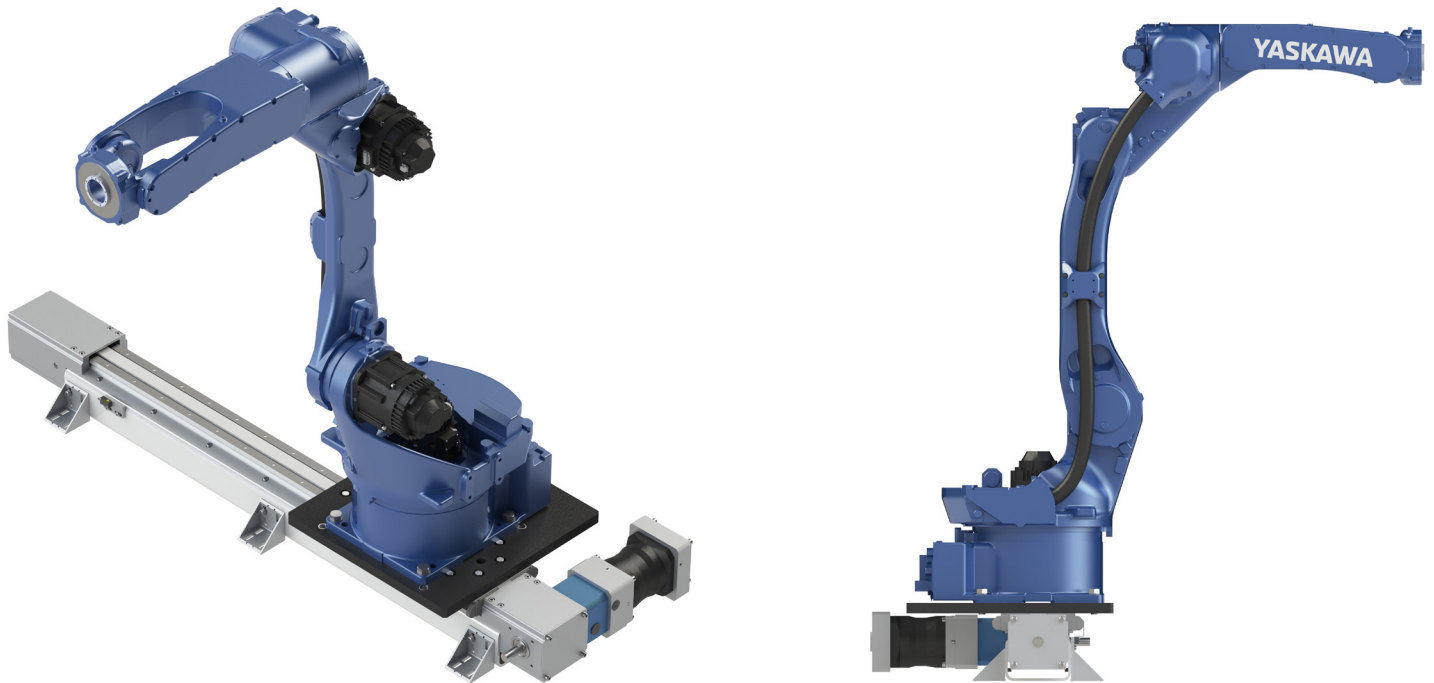

Shown with Yaskawa GP12 robot. Suitable for some, but not all, application conditions.

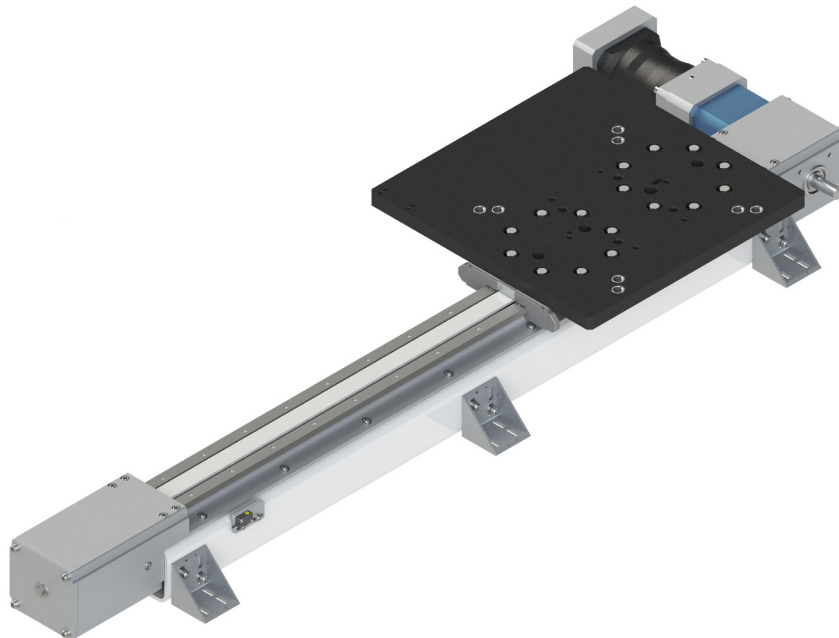

LOPRO® RTU-L LIGHT CAPACITY 7TH AXIS

Light Capacity Features

The LoPro® RTU-L is designed around the **LoPro Linear Actuator** product line to provide accurate and durable motion. The RTU is based upon the size 4 actuator with a single wiper wheel plate and includes the steel support beam, cable carrier, non-contact travel limit sensors, a robot baseplate to adapt to select light capacity robots, and the gearbox with actuator mount so the RTU is ready for rapid and simple deployment into any automation project.

Gearbox w/ Motor Flange

Includes gear box sized to support performance requirements including the motor flange and coupler (5:1 gearbox as standard); motor sold separately

Robot Baseplate

Platform for mounting various robots feature steel threaded inserts and cable carrier mount

DualVee® Wheel Bearings

Four (4) 90-degree vee guide wheel bearings support robots at full reach and payload

DualVee® Track

Hardened 90-degree vee guide track for linear guideways

Belt Drive

Linear drive via steel cable reinforced polyurethane toothed belt

Mounting Brackets

Multi-point mounting brackets enable rapid and rigid mounting

Structural Beam

Constructed with steel rectangular tubing and finished with paint

Travel Limit Sensor(s)


Non-contact inductive sensor detects travel limits and assists homing; additional and alternative sensors available

Belt Tensioning Mechanism


Adjust belt tension to eliminate stretch and improve precision

Cable Carrier (Not Shown)

Cable management system to eliminate tangling; tray not included

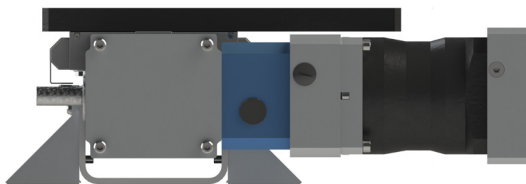


End View

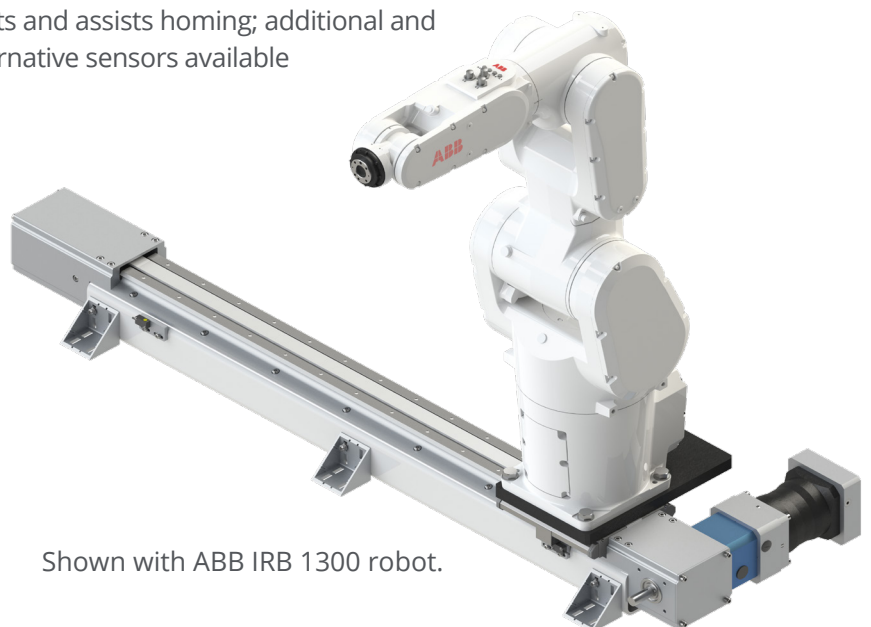

Shown with ABB IRB 1300 robot.

LOPRO® RTU-L LIGHT CAPACITY 7TH AXIS

Dimensions

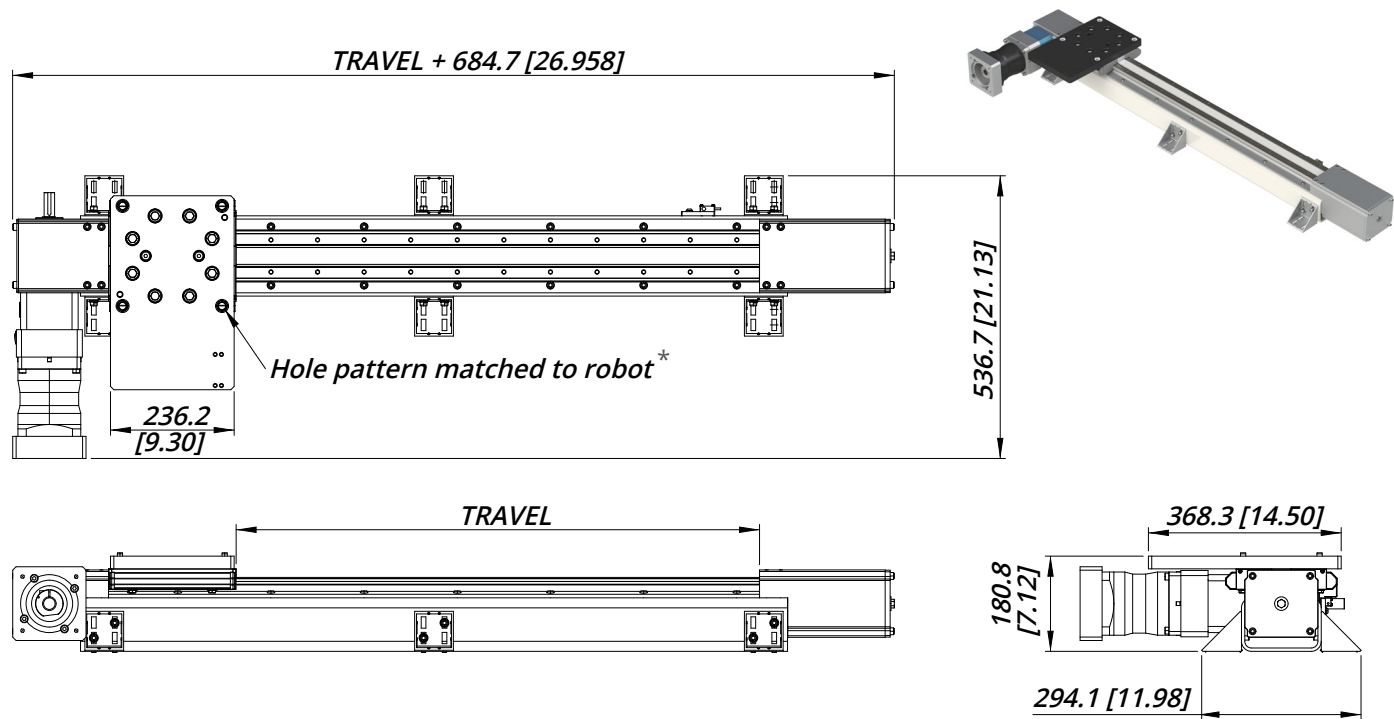


All values in millimeters [inches] unless specified.
Additional actuator dimensions can be found on page 11 of the Bishop-Wisecarver® LoPro Linear Actuator product catalog.
*Actual robot mounting hole pattern will match specified robot, which may impact plate dimensions and overall dimensions; Contact BW for details and updated drawings.

Working Load Capacity

RTU LOAD CAPACITIES	SYSTEM SIZE	AXIAL L_A		RADIAL L_R		PITCH M_P		YAW M_Y		ROLL M_R		THRUST (APPROXIMATE, SLOW SPEED)	
		N	LBF	N	LBF	N-M	LBF-FT	N-M	LBF-FT	N-M	LBF-FT	N	LBF
	LIGHT	15,684	3,526	19,012	4,274	1,220	900	1,478	1,090	1,174	866	2,818	633.5

The thrust capacity is equal to the belt teeth shear strength, which is dependent on system speed. See “Load Calculations” on page 13 and 14.


Working load capacities are based on empirical data on guide wheels used in general applications with static and dynamic load conditions. Guide wheels can routinely achieve travel life of one million cycles or higher when these specified load capacities are observed.

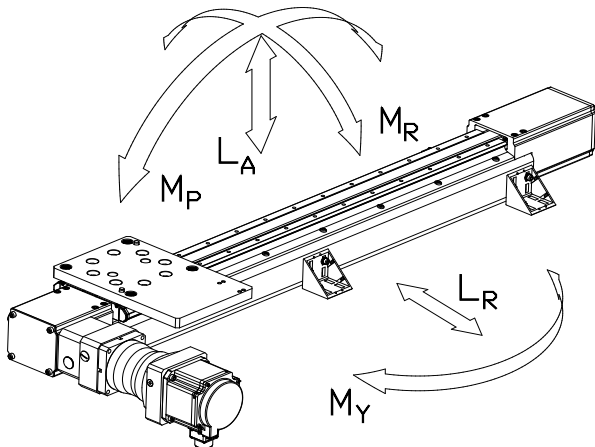

LOPRO® RTU-L INVERTED LIGHT CAPACITY 7TH AXIS


Light Capacity Inverted Features

The LoPro® RTU-L Inverted is designed around the **LoPro Linear Actuator** product line to provide accurate and durable motion when mounted into an overhead location. The RTU is based upon the size 4 actuator with a single wiper wheel plate and includes the steel support beam, cable carrier, non-contact travel limit sensors, a robot baseplate to adapt to select light capacity robots, and the gearbox with actuator mount so the RTU is ready for rapid and simple deployment into any automation project.

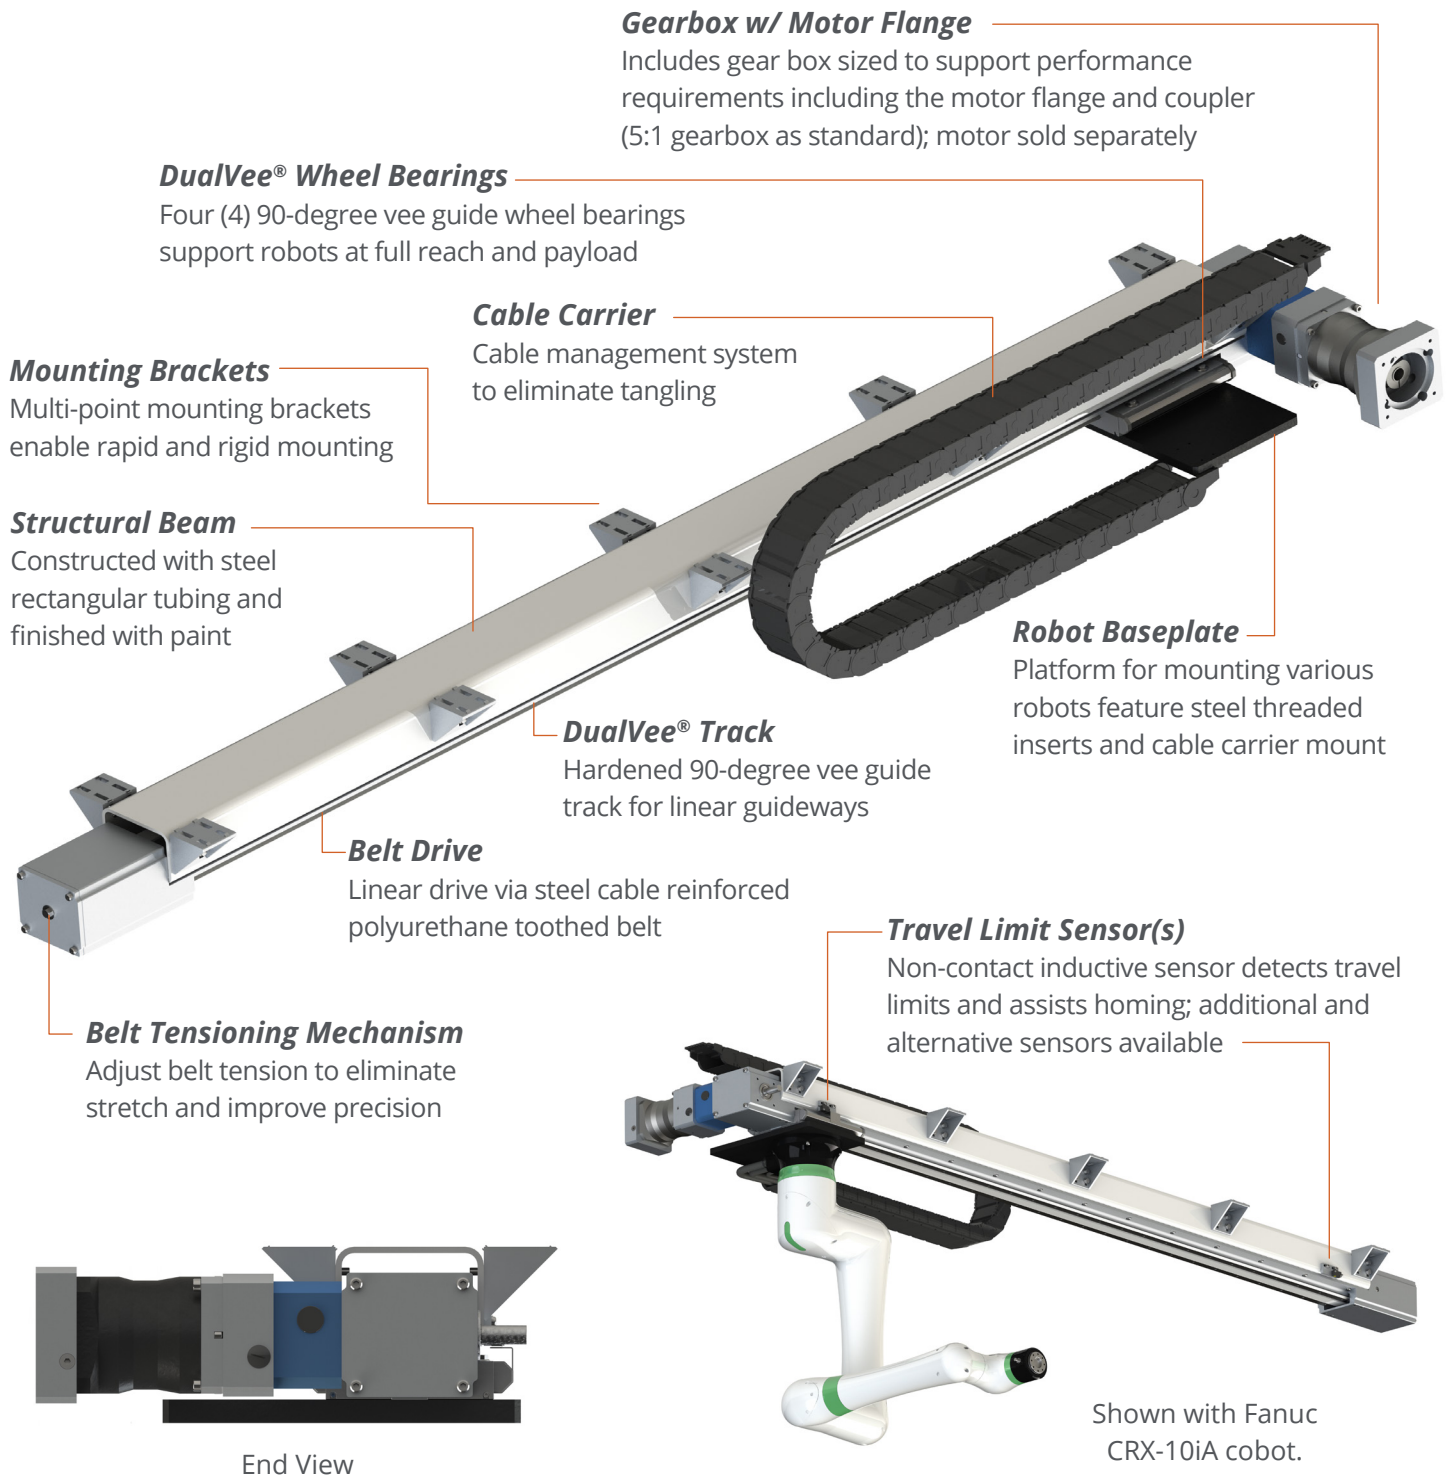

LOPRO® RTU-L INVERTED LIGHT CAPACITY 7TH AXIS

Dimensions

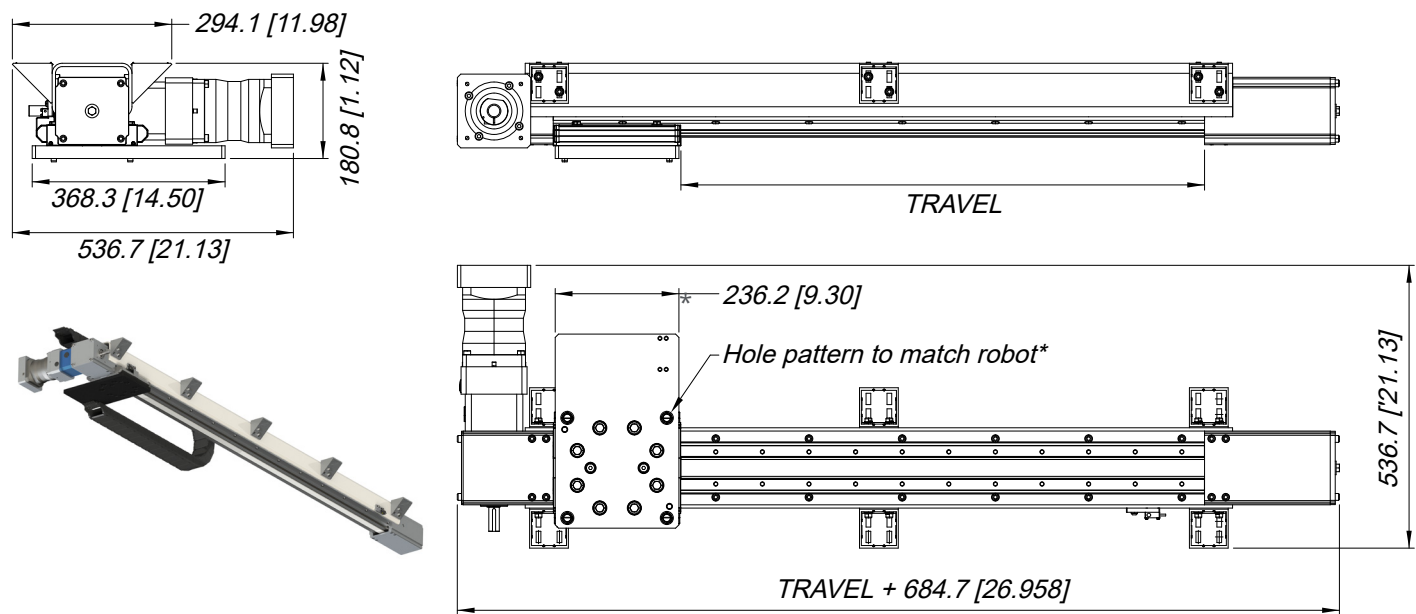

All values in millimeters [inches] unless specified.
Additional actuator dimensions can be found on page 11 of the Bishop-Wisecarver® LoPro Linear Actuator product catalog.
*Actual robot mounting hole pattern will match specified robot, which may impact plate dimensions and overall dimensions; Contact BW for details and updated drawings.

Working Load Capacity


RTU LOAD CAPACITIES	SYSTEM SIZE	AXIAL L_A		RADIAL L_R		PITCH M_P		YAW M_Y		ROLL M_R		THRUST (APPROXIMATE, SLOW SPEED)	
		N	LBF	N	LBF	N-M	LBF-FT	N-M	LBF-FT	N-M	LBF-FT	N	LBF
	LIGHT	15,684	3,526	19,012	4,274	1,220	900	1,478	1,090	1,174	866	2,818	633.5

The thrust capacity is equal to the belt teeth shear strength, which is dependent on system speed. See “Load Calculations” on page 13 & 14.

Working load capacities are based on empirical data on guide wheels used in general applications with static and dynamic load conditions. Guide wheels can routinely achieve travel life of one million cycles or higher when these specified load capacities are observed.

Ordering

LoPro RTU-L Inverted uses part numbers for LoPro RTU-L. Ensure your robot is compatible with inverted installation using the table on page 15, or by contacting our Application Engineers.

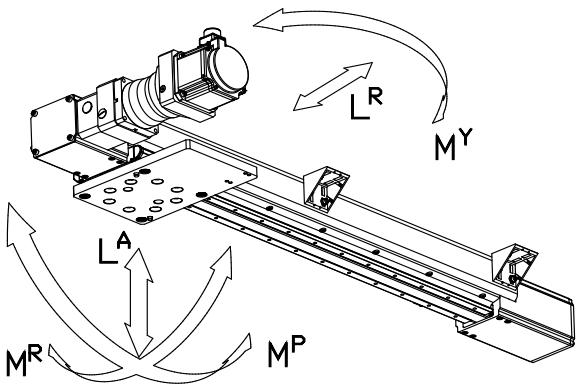

LOPRO® RTU-M MEDIUM CAPACITY 7TH AXIS

Medium Capacity Features

The LoPro® RTU-M is designed around the **LoPro Linear Actuator** product line to provide accurate and durable motion. The RTU is based upon the size 4 actuator with a pair of wiper wheel plates and includes the steel support beam, cable carrier, non-contact travel limit sensors, a robot baseplate to adapt to select light/moderate capacity robots, and the gearbox with actuator mount so the RTU is ready for rapid and simple deployment into any automation project.

Gearbox w/ Motor Flange

Includes gear box sized to support performance requirements including the motor flange and coupler (5:1 gearbox as standard); motor sold separately

Robot Baseplate

Platform for mounting various robots feature steel threaded inserts and cable carrier mount

DualVee® Wheel Bearings

Eight (8) 90-degree vee guide wheel bearings support robots at full reach and payload

DualVee® Track

Hardened 90-degree vee guide track for linear guideways

Belt Drive

Linear drive via steel cable reinforced polyurethane toothed belt

Mounting Brackets

Multi-point mounting brackets enable rapid and rigid mounting

Structural Beam

Constructed with steel rectangular tubing and finished with paint

Travel Limit Sensor(s)


Non-contact inductive sensor detects travel limits and assists homing; additional and alternative sensors available

Belt Tensioning Mechanism

Adjust belt tension to eliminate stretch and improve precision


Cable Carrier (Not Shown)

Cable management system to eliminate tangling; tray not included

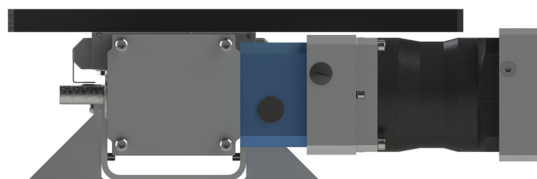


End View

Shown with Universal Robotics UR16e robot. Suitable for some, but not all, application conditions.

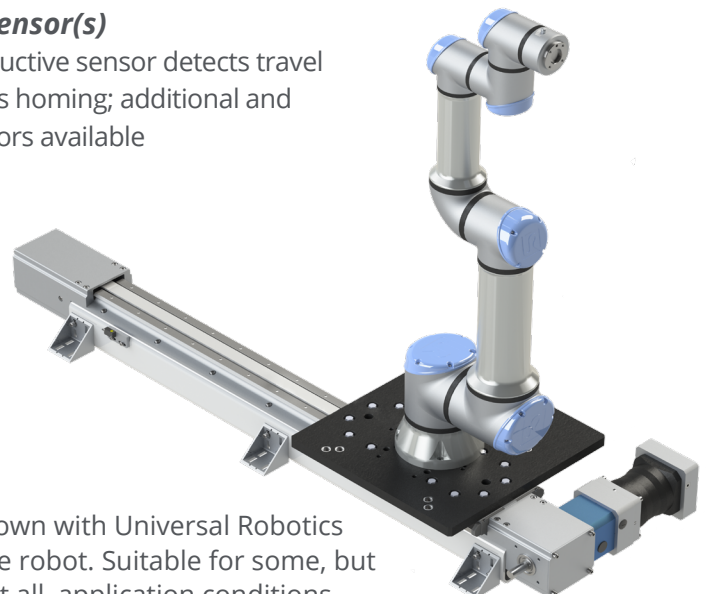

LOPRO® RTU-M MEDIUM CAPACITY 7TH AXIS

Dimensions

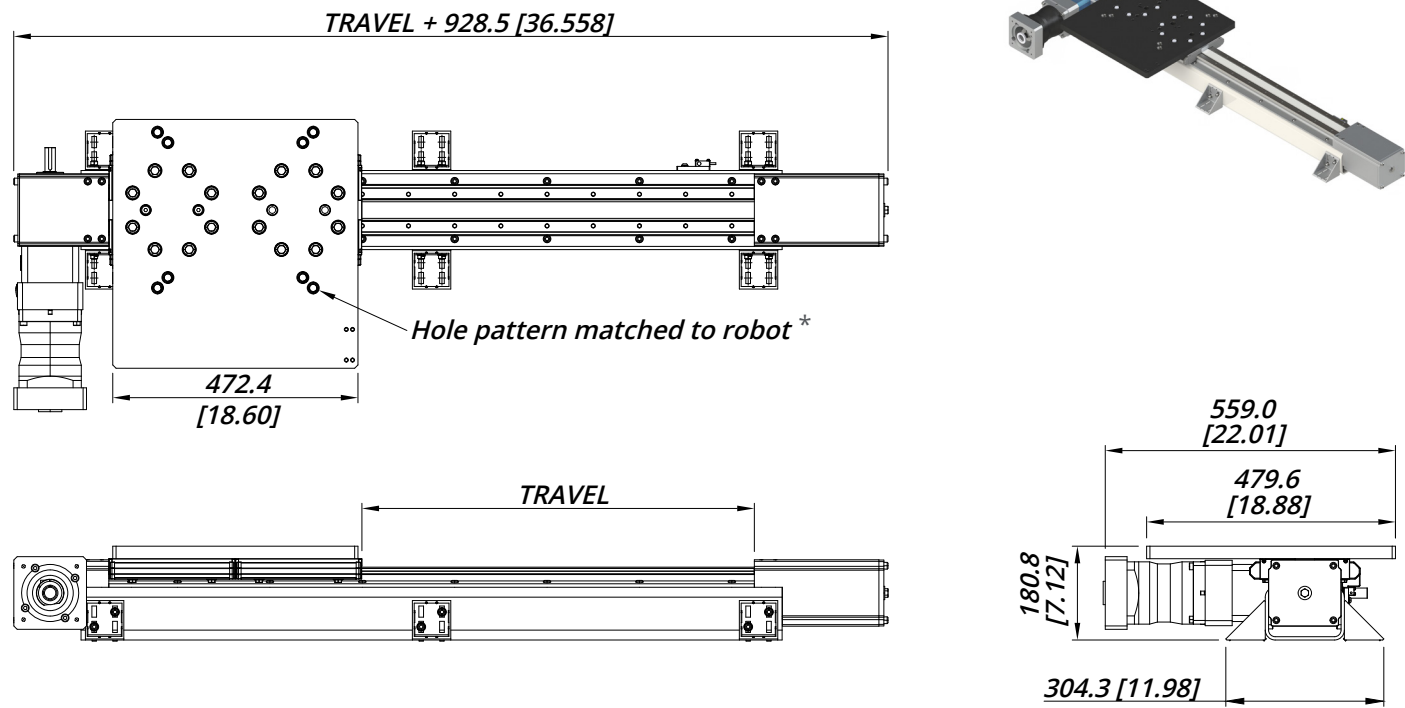


All values in millimeters [inches] unless specified.
Additional actuator dimensions can be found on page 11 of the Bishop-Wisecarver® LoPro Linear Actuator product catalog.
*Actual robot mounting hole pattern will match specified robot, which may impact plate dimensions and overall dimensions; Contact BW for details and updated drawings.

Working Load Capacity

RTU LOAD CAPACITIES	SYSTEM SIZE	AXIAL L_A		RADIAL L_R		PITCH M_P		YAW M_Y		ROLL M_R		THRUST (APPROXIMATE, SLOW SPEED)	
		N	LBF	N	LBF	N-M	LBF-FT	N-M	LBF-FT	N-M	LBF-FT	N	LBF
	MEDIUM	31,368	7,052	38,024	8,548	2,440	1900	2,956	2,180	2,348	1732	2,818	633.5

The thrust capacity is equal to the belt teeth shear strength, which is dependent on system speed. See "Load Calculations" on page 13 & 14.

Working load capacities are based on empirical data on guide wheels used in general applications with static and dynamic load conditions. Guide wheels can routinely achieve travel life of one million cycles or higher when these specified load capacities are observed.

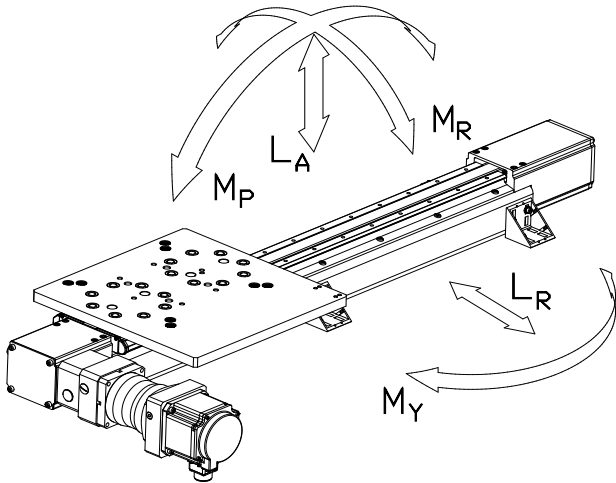


LOPRO® RTU ACCESSORIES

Travel Limit Sensors

LoPro® RTUs include a non-contact inductive proximity travel limit sensor with adjustable mounts, with the option to add a second limit sensor to the opposite end. The wheel plate features a stainless steel cover with sensor flag to trigger the sensor. Travel limit sensors are an important part of an overall safety system and are vital to homing and detecting travel limits. Control safety circuits can be designed to stop motion when limit sensors are triggered. This can be used to prevent damage or injury.

Sensor Flag(s)

Dual wheel plate mounted sensor flags will trigger the travel sensors when detected

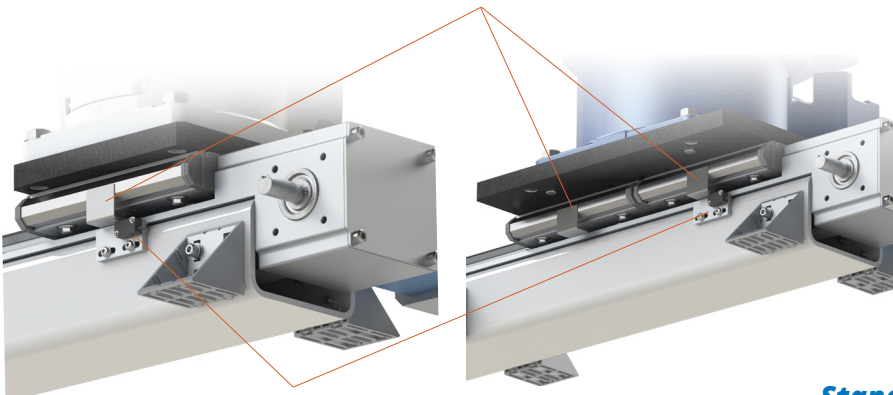

Travel Limit Sensor

Non-contact inductive limit sensor on adjustable mount; One (1) LP4SNSRINDWNOK (NPN normally open sensor kit) quoted as standard for carriage homing. Specify alternative or additional kits as required for your application.

Cable Carrier

SIZE	ADVANTAGE	INTERNAL WIDTH (MM)	INTERNAL HEIGHT (MM)	BEND RADIUS (MM)
NARROW	Greater Space Efficiency	70	45	250
WIDE	More Cable Space; Greater Bend Radius for Thicker Cables	125	45	300

Part Number Scheme

PREFIX	WHEEL PLATE SIZE	INFIX	CABLE CARRIER SIZE	SYSTEM MOUNTING ORIENTATION	-	SYSTEM TRAVEL LENGTH	LENGTH UNIT
LPRTU	L (Light Capacity; Single)	4CC	N (Narrow)	Leave blank for standard mounting	-	Enter value in 1 meter increments, up to 8 meters	M
	M (Medium Capacity; Dual)		W (Wide)	I (Inverted Mounting)	-		

Part Number Example:

LPRTUL44CN-4M = LoPro® RTU Light (Single Wheel Plate Assembly) Cable Carrier, Narrow, Standard Mounting, 4 Meter Travel Length

To discuss alternate configurations or cable carriers for system travel longer than 8 meters, contact a BW Application Engineer.


Sensor Kits

SENSOR TYPE	SENSOR KIT STOCK CODE
NPN Normally Open	LP4SNSRINDWNOK (default)
NPN Normally Closed	LP4SNSRINDWNCK
PNP Normally Open	LP4SNSRINDWPOK
PNP Normally Closed	LP4SNSRINDWPCK

Standard Gearbox Offering

- 10:1 inline planetary gearbox
- Low backlash
- Integrated motor mounting plate*

Ratio	10:1
Nominal Output Torque (Nm)	100.00
Max Acceleration Output Torque (Nm)	150.0
Emergency Output Torque (Nm)	0.0
Nominal Speed (RPM)	2,500
Max Input Speed (RPM)	5,000
Maximum Output Backlash (arcmin)	8
Weight (kg)	5.8
Noise Level (dB)	<70
Mass Moment of Inertia (kg cm ²)	3.1
Efficiency at Load	92%
Lubrication	Mineral Grease EPO
Protection Rating	IP 64
Operating Temperature Range	-20° C to 90° C
D5 (mm)	118.000
L1 (mm)	155.5
L3 (mm)	120.00

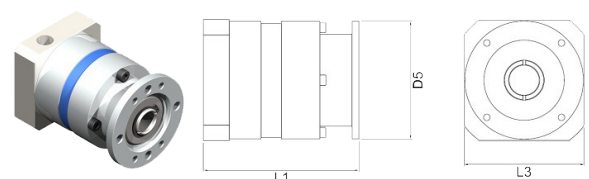

Dimensions are for reference only and may vary with motor selection.

*Your robot manufacturer may recommend a drive motor for RTUs, or you may already have a motor in mind. Notify a BW Application Engineer of your motor selection to have the gearbox mounting plate made to fit your motor.

EXAMPLE ROBOTS

Example Robot Specifications

Various robot manufacturers publish capability specifications including the maximum foundation loading conditions that the robot is capable of transmitting to the mounting base. Below is a summary of robot specifications (for normal operating conditions) that are relevant to the light/medium capacity RTU's from Bishop-Wisecarver.

COBOTS & ROBOT SPECIFICATIONS	BRAND	MODEL	PAYLOAD MAX.	ROBOT WEIGHT	REACH	THRUST	MAX VERTICAL FORCE (F _v)	MAX HORIZONTAL FORCE (F _h)	MAX VERTICAL MOMENT (T _v)	MAX HORIZONTAL MOMENT (T _h & T _p)	RTU WHEEL PLATE SIZE
			KG	KG	MM	N	N	N	N-M	N-M	
	ABB	IRB 1300	12	79	1,400	821	1,428	821	236	814	Light / Medium
	ABB	IRB 1600	10	250	1,200	1,850	3,850	1,850	855	1,750	Medium*
	FANUC	M-10iD/16S	16	140	1,103	566	2,205	566	255	2,007	
	YASKAWA	GP12	12	150	1,440	566	1,475	2,948	1,275	1,670	
	YASKAWA	GP8	8	32	1,312	343	343	343	216	265	Light; Capable of Inverted Installation
	FANUC	CRX-10iA	10	39	1,249	220	800	220	250	610	
	UNIVERSAL ROBOTS	UR10e	12.5	33.5	1,300	246	894	246	280	682	

* These robots are not recommended for medium 7th axis when loaded to maximum payload. In all cases, please verify your specific robot loading specifications to determine suitability. Robot specifications are provided by the manufacturer and referenced here for convenience.

LOAD CALCULATIONS

Thrust Load Specifications

RTU SYSTEM BELT LOAD CAPACITIES				DRIVE END PULLEYS PITCH DIAMETER		BELT TEETH SHEAR STRENGTH FORMULA (N)* (APPROX.)	BELT TEETH SHEAR STRENGTH AT V=0 M/S (N)*	BELT TEETH SHEAR STRENGTH AT V=5.5 M/S (N)*
SYSTEM SIZE	BELT SIZE	WORKING TENSILE LOAD						
		N	LBF	MM	IN			
LIGHT/ MEDIUM	32AT10	4,170	937	95.5	3.759	F= 2818 - 4.80V ³ + 60.0V ² - 369V	2,818	1,805

If the wheel plate will be subjected to shock loads, divide the permissible linear force by a safety factor of 1.4 (light shock) to 2 (high shock).

*The belt teeth shear strength is the permissible linear force which the drive pulley can apply to the wheel plate. The sum of the linear force applied to the wheel plate and the belt pretension load must not exceed the working tensile load. V = Linear Speed.

LOAD CALCULATIONS

Sizing and Selection Tips

The following equation is for the purpose of estimating the applied load factor to the wheel plate and track plate only. System drive components are not accounted for, but should also be considered.

For application review, static and dynamic conditions must be considered which include, but are not limited to robot payload, robot motion profile, and worst case dynamic loading conditions.

Step 1: Calculate all forces applied to the wheel plate

Any forces applied on the wheel plate need to be considered, including inertial forces, gravitational forces, external forces such as tool pressure, impact loading, and payload. The most conservative calculations will use max foundational loading values from robot manufacturer catalogs.

If assistance is required in resolving specific loads into the resultant forces, please contact our Applications Engineering staff.

Step 2: Calculate load factor for the wheel plate


$$L_F = \frac{F_R}{L_R} + \frac{F_A}{L_A} + \frac{T_P}{M_P} + \frac{T_Y}{M_Y} + \frac{T_R}{M_R} \leq 1$$

- WHERE**

 - L_F = Load factor
 - F_R = Resultant radial load
 - F_A = Resultant axial load
 - T_P = Resultant Pitch Moment Load
 - T_Y = Resultant Yaw Moment Load
 - T_R = Resultant Roll Moment Load
 - L_R = Radial Working Load Capacity
 - L_A = Axial Working Load Capacity
 - M_P = Pitch Moment Load Capacity
 - M_Y = Yaw Moment Load Capacity
 - M_R = Roll Moment Load Capacity
- See RTU load capacities on pages 7, 9, and 11.

Since the robot can only be extended in one horizontal direction, it is often possible to use T_R = max applied horizontal moment and T_P = 0.

If the load factor L_F is >1, consider a larger size system.

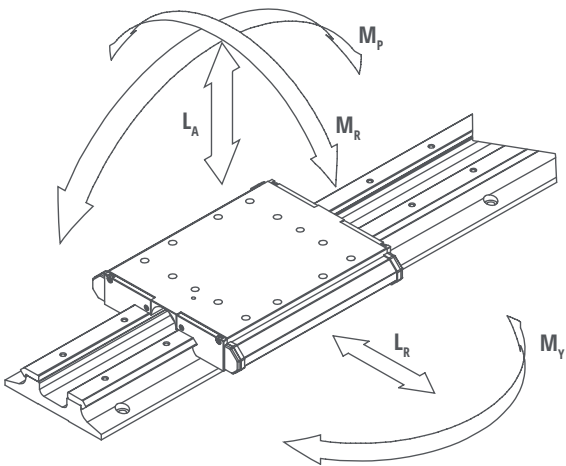

Step 3: Calculate estimated life with adjustment factor

The Life Estimate below shares units with the Life Constant.

Life Estimate = $\left(\frac{L_C}{(L_F)^3} \right) A_F$

WHERE

- L_F = Load Factor
- L_C = Life Constant
- A_F = Adjustment Factor

Life Constant L_C		
WHEEL SIZE	KILOMETERS OF TRAVEL LIFE	INCHES OF TRAVEL LIFE
4	173	6.84×10^6

Adjustment Factor A_F	
CONDITIONS	A_F
Clean, adequate lubrication, low duty, low shock, low vibration	1.0 - 0.7
Moderate contamination, medium duty, medium shock, low to medium vibration	0.7 - 0.4
Heavy contamination, limited lubrication, high duty, high acceleration, medium to high shock, high vibration	0.4 - 0.1

STOCK CODES, SET-UP AND MAINTENANCE

Part Number Scheme							
PREFIX	WHEEL PLATE SIZE*	TRACK / WHEEL MATERIAL	SENSOR / DRIVE ORIENTATION	ROBOT**	-	TRAVEL LENGTH	LENGTH UNIT
LPRTU	L (Light Capacity; Single)	4C (Size 4 Carbon Steel; Standard)	RR (Sensors Right, Gearbox & Cable Carrier Right)	A (ABB IRB 1300; use wheel plate L or M)	-	Enter value in 1 meter increments	M
	M (Medium Capacity; Dual)	4S (Size 4 Stainless Steel)	RL (Sensors Right, Gearbox & Cable Carrier Left)	B (Fanuc M-10iD; use wheel plate M)			
			LL (Sensors Left, Gearbox & Cable Carrier Left)	C (Yaskawa GP12; use wheel plate M)			
			LR (Sensors Left, Gearbox & Cable Carrier Right)	D (ABB IRB 1600; use wheel plate M)			
				E (Fanuc CRX-10iA; use wheel plate L; can be installed inverted)			
				F (Universal Robotics UR10e; use wheel plate L; can be installed inverted)			
				G (Yaskawa GP8; use wheel plate L; can be installed inverted)			

Part Number Example:


LPRTU4CRLB-2M = LoPro® RTU, Dual Wheel Plate Assembly, Right Hand Sensor Orientation, Left Hand Drive Assembly, mounting for Fanuc M-10iD, compatible, 2 meter travel length.

*For LoPro RTU-L Inverted, use Wheel Plate L. Ensure robot is supported for inverted installation.

**Robots listed here are for example only; many more robots can be used with LoPro RTU. Always validate robot application conditions using the sizing calculations on the previous page. Contact us to specify robots not listed here.

Left/Right Orientation (Top View Shown)

Need a custom shaft or other configuration? Contact us!

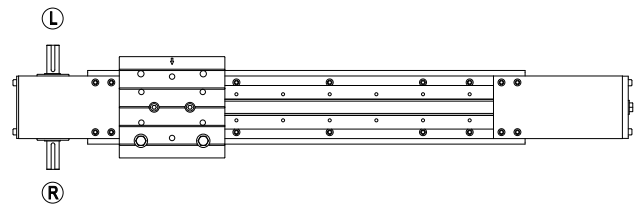

Accuracy/Repeatability

The accuracy of a LoPro® RTU linear system is dependent upon the mounting surface preparation and the technique used to align the track. RTU systems can achieve straightness and flatness characteristics to within .004in/foot (0.1mm/300mm) when mounting surfaces are adequately prepared. Straight line accuracy of beam mounted RTU's are subject to the industry standard straightness and twist tolerances associated with extruded or hot formed sections.

Fit-up Adjustment

The concentric bushings/wheels determine the alignment of the system, while the eccentric bushings/wheels provide adjustment. Normal adjustment is obtained by rotating the eccentric bushings until all free play is removed from the carriage assembly. When the eccentrics are adjusted and the carriage plate is held firmly in place, one should be able to rotate, by hand, any of the four guide wheels against its mating track. If rotation is not possible, preload on the wheels should be reduced accordingly. Over-tightening the eccentric adjustment could exert a force greater than the load rating of the wheel and result in premature bearing failure. All RTU systems are factory pre-adjusted and assembled before delivery.

Lubrication

Lubrication is the key to maximizing service life in any rolling contact linear bearing design. RTU guide wheels are internally lubricated for the expected service life with an extreme pressure, corrosion resistant grease. As such, the main consideration with regards to lubrication is the wheel/track interface.

Typically, a light machine oil or an extreme pressure grease does well to minimize wear, stick slip, and corrosion. Lubrication will maximize the load capacity of an individual bearing element. As such, for any specific loading condition, the presence of lubrication on the guide ways will significantly increase the service life over a non-lubricated configuration under the same loads.

RTU systems include wiper wheel plates that feature lubricating wiper caps which contain oil saturated felt lubrications. Frequent inspection and re-saturation with fresh oil is recommended to ensure that the wheel/track interface is well lubricated.

Disclaimer: All trademarks, logos and brand names are the property of their respective owners. All company, product and service names used in this catalog are for identification purposes only. Use of these names, trademarks, and brands does not imply endorsement.

Components & Accessories

DualVee®
 MadeWell®
 GV3
 SL2
 PRT2
 HDS2
 HDRT
 MCS
 Motor Mounts
 Gantry Brackets
 Wrenches

Manual Linear Guide Systems

DualVee®
 UtiliTrak®
 MinVee®
 GV3
 Simple Select®
 SL2
 HDS2
 MHD
 HTS

Actuated Linear Guide Systems

LoPro®
 XLA™
 ECO60™
 SlickStick™
 SteadyRail™
 HDLS
 HDCS
 PDU2
 DAPDU2
 SBD
 PSD
 SDM
 DLS

Rotary Guide Systems

PRT2
 DTS2
 DTS
 DTS+
 ALR
 HDRT
 1-Trak
 GFX

Robot Transfer Units

DualVee® RTU
 LoPro® RTU

Custom Solutions

Extruded Profile Guides
 Custom Bearings
 Custom Sub-assemblies
 Engineering Services
 Large Diameter Ring Guides and Track

Women's Business Enterprise



- Certified WOSB

Quality Certifications



- Certified Bay Area Green Business
- Certified Evergreen



Certifications & Compliance

- EN 9100:2018
- JISQ 9100:2016
- ISO 13485 & GMP Compliance
- Responsible Minerals Initiative
- RoHS
- International Traffic in Arms Regulations Compliant

