

FPM-817S

17" SXGA Industrial Monitor with Resistive Touch Control, Direct VGA, DP Ports, and 304 Stainless Steel Front Bezel



Introduction

The FPM-800S series are rugged industrial monitors that support a wide operating temperature range (-20 ~ 60 °C/-4 ~ 140 °F), making them suitable for diverse applications. The true-flat front panel is IP66 rated for protection from water and dust to ensure easy cleaning. With the provision of a 304 stainless steel front bezel, FPM-800S is especially suitable for operation in hazardous and strict hygiene environments.

Specifications

General

▪ OSD Controls	OSD control pad on rear panel with lockable function, 2 x user-defined contrast/brightness settings
▪ Certification	CE, FCC Class A, BSMI, CCC, UL
▪ Dimensions (W x H x D)	432.5 x 365.5 x 59.3 (17.03 x 14.39 x 2.33 in)
▪ Enclosure	Front panel: 304 stainless steel bezel Rear cover: SPCC with anti-rust coating
▪ Mount Options	Panel, wall, desktop, VESA arm
▪ Power Input	Phoenix jack: 24 V _{DC} input
▪ Power Consumption	12W +20%
▪ Video Port	VGA+DP
▪ Weight (Net)	6.2kg (13.67 lb)

LCD Display

▪ Display Type	SXGA TFT LCD
▪ Backlight Type	LED
▪ Display Size	17"
▪ Max. Resolution	1280 x 1024
▪ Max. Color	16.7M
▪ Viewing Angle (H/V)	160°/140°
▪ Luminance	350 cd/m ²
▪ Backlight Life	50,000 hr
▪ Contrast Ratio	800:1

Features

- 17" SXGA TFT LED LCD with 50K backlight lifetime
- Robust design with 304 stainless steel front bezel and anti-rust coated SPCC rear cover
- Wide operating temperature range (-20 ~ 60 °C/-4 ~ 140 °F)
- Increased reliability with enhanced 5-wire resistive touch sensor
- Anti-glare screen with tempered glass and IP66-certified front panel
- Direct VGA+DP video input interface
- OSD control pad with lockable function on rear panel
- Supports panel, VESA, wall, desktop, and stand mounting

Touchscreen

▪ Driver	Penmount 6000
▪ Type	5-wire resistive with enhanced ITO film
▪ Interface	USB
▪ Lifespan	36 million with a silicone rubber R8 finger, writing rate is by 250g at 2 times/s
▪ Light Transmission	> 80%
▪ OS Support	Windows XP, 2000, Vista, 7,8,10,11, Embedded, CE, Linux

Environment


▪ Operating Temperature	-20 ~ 60 °C (-4 ~ 140 °F)
▪ Storage Temperature	-30 ~ 70 °C (-22 ~ 158 °F)
▪ Humidity (Storage)	10 ~ 90% non-condensing
▪ IP Rating	IP66-rated front panel
▪ Shock	11 ms, 10G (non-operating, half-sine wave)
▪ Vibration	5 ~ 500 Hz, 1 Grms (operating, random)

Ordering Information

▪ FPM-817S-R6AE	17" SXGA industrial monitor with stainless steel front bezel, wide operating temperature, and resistive touchscreen
------------------------	---

Dimensions

Unit: mm

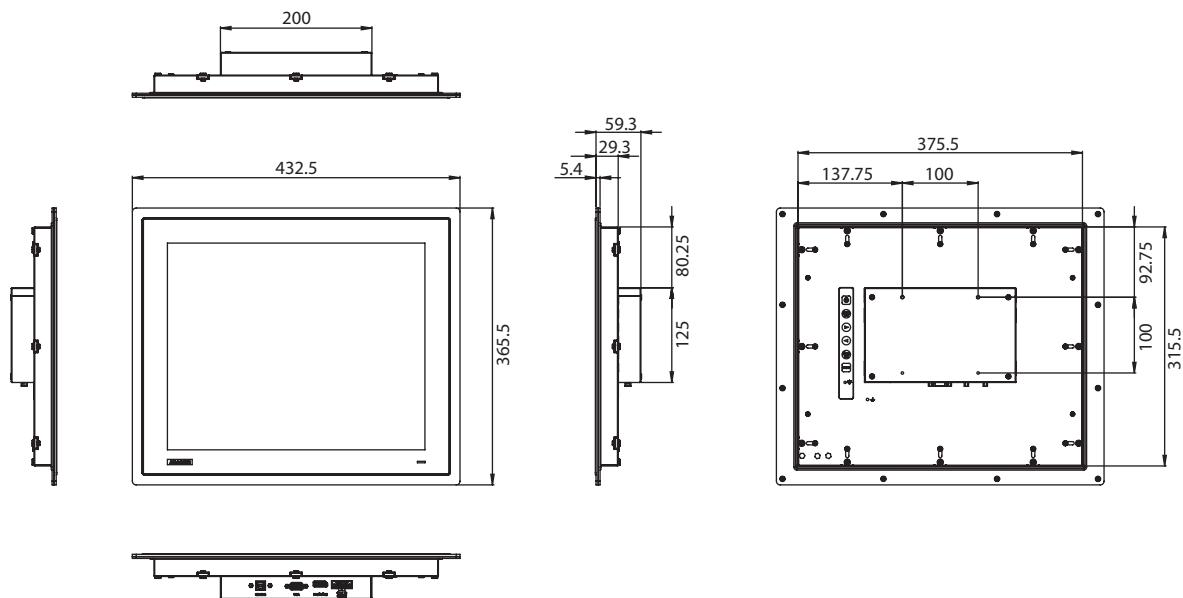


Optional Accessories

- **1702002600** Power cable US plug 1.8 M
- **1702002605** Power cable EU plug 1.8 M
- **1702031801-11** Power cable UK plug 1.8 M
- **1700000596-11** Power cable China/Australia plug 1.8 M
- **PWE-247-DE** Adapter 100 ~ 240V 60W 24V 2.5A

Mounting kit

- **FPM-1000T-SMKE** Desktop Mounting kit for FPM series
- **PPC-174T-WL-MTE** Wall mount kit A800B
- **PPC-ARM-A03** ARM VESA Standard (A-CLEVER)
- **PPC-STAND-A1E** Stand mounting kit

Front View

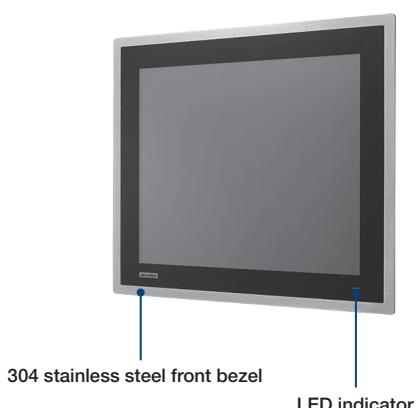

Rear View

