

# UNO-2484G V2

**Intel® Core™ 11th i7/i5/i3 Processor  
Modular Box PC with 4 x GbE, 4 x USB,  
2 x M.2, 2 x mPCIe, HDMI 1.4, DP1.4a**

**NEW**



Single-stack

Double-stack



## Features

- Intel® Core™ 11th i7/i5/i3 Processor with 8GB DDR4 3200Mb/s memory
- 4 x GbE, 3 x USB 3.2 Gen2, 1 x USB2.0, 1 x HDMI 1.4, 1 x DP 1.4a, 4 x RS232/422/485
- Optional 2nd layer for up to 2x iDoor extension or customize for domain applications
- Compact fanless design
- Ruggedized by zero cable and lockable I/O design
- Display port supports 4K Ultra HD
- Supports 30+ iDoor combination to expand wireless connectivity, industrial fieldbus or more I/O
- Supports NVME storage w/ high data-transmission efficiency
- DP++ ensures HDMI/DVI compatibility

## Introduction

Advantech's UNO-2000 series of embedded automation computers are highly rugged, fanless systems. The modular design offers vigorous computing performance and flexible scalability with various I/O ports to support IoT Connectivity. The UNO-2484G V2 features powerful computing capacity, optimized I/O port and expansion options supporting high speed and low latency wire/ wireless connectivity and NVME storage for IoT edge data transmission. 4K Ultra HD display ports provide high resolution and with an optional second expansion stack, users can have even more I/O options with Advantech's iDoor technology.

## Specifications

### General

- Certification** CE, FCC, UL, CCC, BSMI
- Dimensions (W x D x H)** 200 x 140 x 40 (7.8" x 5.6" x 1.6") for single stack  
200 x 140 x 70 (7.8" x 5.6" x 2.8") for single stack w/ expansion stack UNO-2484G V2 version
- Form Factor** Regular size with stackable design
- Enclosure** Aluminum housing
- Mounting** Stand, wall, VESA (Optional), DIN-rail (Optional)
- Weight (Net)** Single stack: 1.4kg (3.09lbs)
- Power Requirement** 10 ~ 36 V<sub>DC</sub>
- Power Consumption** 30.2W (Typical), 85W (Max)
- OS Support** Win10 LTSC, Win11 LTSC, Ubuntu 20.04; 22.04
- Software Compatibility** WISE-Edge365

### System Hardware

- BIOS** AMI 256 Mbit SPI
- Watchdog Timer** Programmable 255 levels timer interval, from 1 to 255 sec
- Hardware Security** TPM2.0
- Processor** 11th Gen Intel Core  
Core™ i3-1115G4E dual-core 2.2GHz  
Core™ i5-1145G7E quad-core 1.5GHz  
Core™ i7-1185G7E quad-core 1.8GHz
- Memory** Built-in 8GB DDR4 3200 MHz, supports up to 64GB (2 slots)
- Graphics Engine** Intel® Iris® Xe Graphics
- Ethernet** LAN A: Intel i219-LM 1Gb/s, IEEE 802.3, 802.1as/1588  
LAN B-D: Intel® i226-LM 2.5Gb/s, IEEE 802.3, 802.1as/1588
- LED Indicators** LEDs for Power, HDD, LAN (Active status), RTC Battery low

### Expansion/Storage

- 1 x M.2 B key slot (USB Signal for 3042/3052 LTE/5G/LTE module, SATA signal for storage)
- 1 x 2.5" SSD SATA drive bay
- \*Support RAID0/RAID1 with 2.5" SSD and M.2 B key 2242 SSD.
- 1 x M.2 M key (PCIex4) supports 2280 NVME SSD
- 2 x mPCIe slot (PCIe, USB2.0 signal)

### I/O Interfaces

- Serial Ports** 4 x RS 232/422/485, 50-115.2 kbps speed
- LAN Ports** 1 x RJ45, 10/100/1000 Mbps  
3 x RJ45, 10/100/1000/2500 Mbps
- USB Ports** 3 x USB 3.2 Gen2, 1 x USB2.0
- Displays** 1 x HDMI 1.4 (3840x2160@30Hz)  
1 x DP 1.4a (4096x2304@60Hz)
- USB Type-C** 1 x USB3.2 Gen2, support DP1.4a Alt. mode
- Power Connector** 1 x 2 pins, terminal block


### Environment

- Operating Temperature** -20 ~ 60°C (-4 ~ 140°F) @ 5 ~ 85% RH with 0.7 m/s airflow
- Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- Relative Humidity** 10 ~ 95% RH @ 40°C, non-condensing
- Shock Protection** Operating, IEC 60068-2-27, 50G, half sine, 11 ms
- Vibration Protection** Operating, IEC 60068-2-64, 3 Grms, random, 5 ~ 500 Hz, 1hr/axis (mSATA)
- Ingress Protection** IP40


\*Be sure to select thermal pad for CPU/RAM for RAM capacity expansion

## Installation Scenario


Stand/Wall Mount



DIN-rail Mount (Optional)






VESA Mount (Optional)







## Dimensions

Unit: mm


UNO-2484G V2 Single stack

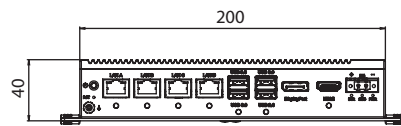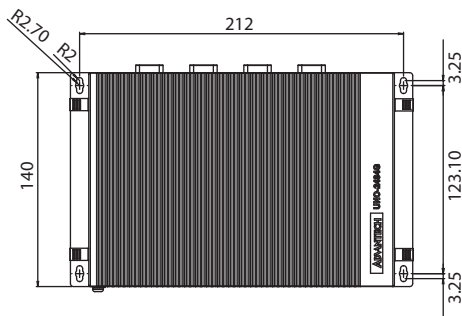


UNO-2484G V2 Single stack + Expansion stack

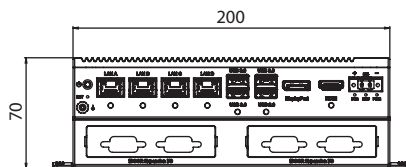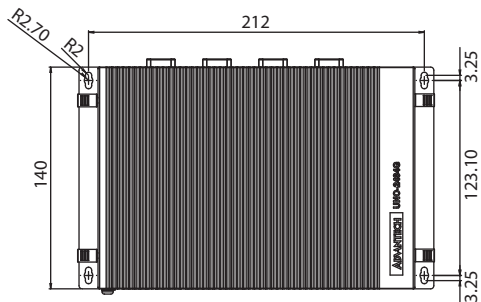

## Front I/O View

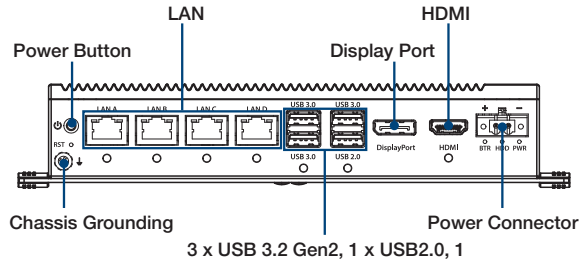

## Rear I/O View

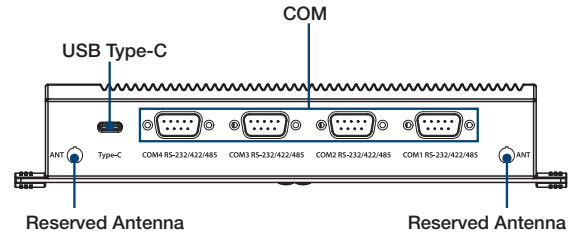

## Ordering Information

| Ordering P/N     | CPU        | Memory  | M.2                  | mPCIe slot | iDoor                                | USB | COM | LAN | Antenna hole  | Remark    |
|------------------|------------|---------|----------------------|------------|--------------------------------------|-----|-----|-----|---------------|-----------|
| UNO-2484G-B731AE | i7-1185G7E | 8G DDR4 | M key *1<br>B key *1 | 2          | 2 (with 2nd stack<br>UNO-2484G-EKCE) | 4   | 4   | 4   | 4 (Base unit) | -         |
| UNO-2484G-B731AU | i7-1185G7E | 8G DDR4 |                      |            |                                      |     |     |     |               | US Region |
| UNO-2484G-B531AE | i5-1145G7E | 8G DDR4 |                      |            |                                      |     |     |     |               | -         |
| UNO-2484G-B331AE | i3-1115G4E | 8G DDR4 |                      |            |                                      |     |     |     |               | -         |
| UNO-2484G-B331AU | i3-1115G4E | 8G DDR4 |                      |            |                                      |     |     |     |               | US Region |

## iDoor Modules

Supporting by base unit with second extension stack.  
Contact Advantech for more compatible iDoor solutions.

### Compatible With mPCIe Slot

- PCM-2300MR-BE MRAM, 4 MB, mPCIe
- PCM-23U1DG-CE USB slot w/ lock for USB dongle, half-size mPCIe
- PCM-24D2R2-BE 2-Port Isolated RS-232, mPCIe, DB9
- PCM-24D2R4-BE 2-Port Isolated RS-422/485, mPCIe, DB9
- PCM-24D4R2-BE 4-Port Non-Isolated RS-232, mPCIe, DB37
- PCM-24D4R4-BE 4-Port Non-Isolated RS-422/485, mPCIe, DB37
- PCM-24R1TP-BE 1-Port Gigabit Ethernet, mPCIe, RJ45
- PCM-24R2GL-AE 2-Port Gigabit Ethernet, mPCIe, RJ45
- PCM-24S2WF-CE WIFI 802.11 a/b/g/n/ac 2T2R w/BT4.1, Intel AC9260
- PCM-24U2U3-BE 2-Port USB 3.0, mPCIe
- PCM-26D2CA-BE 2-Port CANBus, mPCIe, DB9 x 2 (PCIe Type)
- PCM-26D2CA-CE 2-Port CANBus, mPCIe, DB9 x 2 (USB Type)
- PCM-27D24DI-AE 24-Channel Isolated Digital I/O w/ counter, mPCIe, DB37

## Embedded OS

- 20704WX1HS0017 Img Win10 LTSC V6.08 B042 UNO-2484G\_V2 High
- 20704WX1VS0017 Img Win10 LTSC V6.08 B042 UNO-2484G\_V2 Value
- 20701U2DS0001 Image AdvLinuxTu-IOTG\_x64 V4.0.4 for UNO series
- 20704U2DS0008 Image AdvLinuxTu-IOTG\_x64 V3.4.1 for UNO series
- 20701WLH1S0011 Img WIN11 LTSC v7.01 B020 for UNO-2484G\_V2 High
- 20701WLH1S0012 Img WIN11 LTSC v7.01 B020 for UNO-2484G\_V2 Value

## Optional Accessories


- 96PSA-A150W24T2-4 Power Adapter 150W
- 96PSA-A120W24T2-4 Power Adapter 120W
- 1702002600 Power Cable US Plug 1.8 M (Industrial Grade)
- 1702002605 Power Cable EU Plug 1.8 M (Industrial Grade)
- 1702031801-11 Power Cable UK Plug 1.8 M (Industrial Grade)
- 1700000596-11 Power Cable China/Australia Plug 1.8 M (Industrial Grade)
- 1700033574-01 F cable 2x10P-2.0x2/IDE#2 16P-2.54 17CM
- UNO-2000G-VMKAE UNO-2000 VESA Mount Kit
- UNO-2000G-DMKAE UNO-2484G DIN RAIL Kit
- UNO-2000-LKAE Cable lockable kit 10 units/per pack
- UNO-REPWR-AE Remote power & reset kit
- 1990021846N000 Thermal Pad for adding 2nd RAM
- 1990038771N000 CPU Thermal Pad
- 1990036433N050 Thermal Pad for LAN IC (Please place 3 pcs for 2.5GB LAN)
- 98R1U248400 Thermal kit for 2nd stack M key(2280)
- 98R1U248410 Thermal kit for 2nd stack B key(3052)

Please note: If some optional modules are offered with the system, additional system certificates may be required in certain regions/countries.

# Stackable Extension Kits

## UNO-2484G-EKCE

Second stack module for supporting 2\*iDoor on  
UNO-2484G V2



### Specifications

| General    |                                      |
|------------|--------------------------------------|
| Expansion  | 2 x iDoor, 4 x reserved antenna hole |
| Dimensions | 200 x 140 x 30 mm                    |
| Weight     | 400g                                 |

### Ordering Information

| Ordering P/N   | Description                        |
|----------------|------------------------------------|
| UNO-2484G-EKCE | UNO-2484G V2 2nd stack for 2 iDoor |